



Driven Beyond Perfection

VARIABLE WINDSHIELD WIPER SWITCH — 2 SPEED

INSTALLATION GUIDE

Thank you for choosing Scott Drake product. The patented variable Wiper Control is designed to plug into your existing Mustang wiring harness with absolutely no cutting. It also retains the stock dash appearance. The installation process will take about 20 minutes.

PREPARATION:

The tools needed are, a tube nut tool or two small flat blade jeweler type screwdrivers, a sheet metal screw for the ground wire, and electrical tape.

First verify that your two speed system is operating properly. Turn on your ignition and check that the system stops in the “park” position when turned off. Check that both speeds work properly. Also check that the washer (if equipped) operates. If not, make repairs to these systems before proceeding.

INSTALLATION:

1) Make sure the key is off for these next few steps.

Remove the stock knob. This is accomplished by simply pulling on the knob or by removing a set screw. (pic.1)

2) Using a tube nut tool or two small flat blade screwdrivers, turn the tube nut counter clockwise and remove. Also remove the switch bezel and set it aside. (pic.2)

3) Push the wiper switch back and feed it out through the dash. Disconnect the connector from the switch body. Remove the dash spacer and set it aside. (pic.3)


4) Line the Classic Solutions wiper switch up with the stock connector and install. It's a good idea to tape these two connectors together. (pic.4)

5) Next install the ground wire using a sheet metal screw. Find a good clean location. We recommend the lower dash brace. (pic.5)

6) Now turn the ignition back on and test your new switch. You'll need to temporarily install the knob for this. If it works, proceed with the next steps. If not, check the connections.

7) Place the dash spacer onto the end of the switch bushing as shown, Feed the switch back up through the dash and carefully line up the marks on the spacer and the marks on the dash panel. Install the switch bezel and tube nut and tighten to snug. (pic.6)

8) Reinstall the knob and retest. If all tests well, the job is complete!

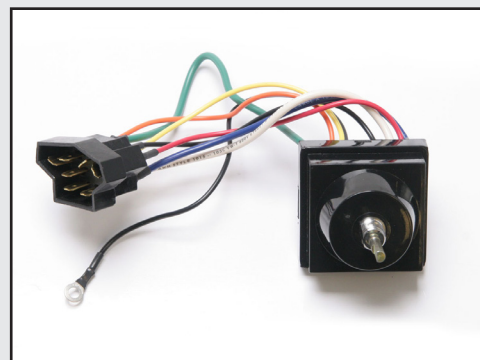

C5ZZ-17A553-V2 shown



Picture 1



Picture 2



Picture 3

17A553-V2_INST



OFF

Long Interval

Push and hold for washer pump and wipe in any knob position even OFF

Short interval

Speed 1 (on)

Speed 2



This diagram shows the detent positions of all Scott Drake interval wiper switches. The detent positions are felt as the wiper knob is rotated. All switches are also equipped with a washer pump activation circuit. The washer pump is activated by pushing the shaft inward firmly and holding it for up to 3 seconds. When the washer pump is activated, the pump will be provided with 12 volts, and the wipers will operate.

Operation Instructions for all 2 Speed Wiper Switches

The wiper switch turns OFF in the full counter clockwise direction. The following steps describe the operation of the device as the wiper shaft is rotated in a clockwise direction.

From the off position, the closest detent is the long-interval position. The long interval has a delay of approximately 10 seconds

The interval decreases infinitely as the shaft is rotated clockwise. The short interval position gives a delay of about 1 second.


The next detent position is slow speed. In slow speed the wiper is continuously on. The last detent position is high speed.

The wiper is also equipped with a washer switch. To activate the washer pump, push the knob in for at least 1 second. This activates an internal switch inside the wiper device.

After activation of the washer pump, the wipers will operate for 2-3 seconds or as long as the washer pump is "on".



Picture 4

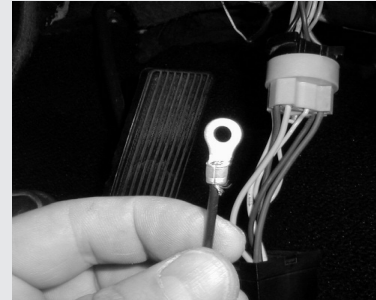

Picture 5



Picture 6

SATISFACTION GUARANTEE:

If you are not happy with this product for any reason or found product to be defective in manufacturing, simply return it to Scott Drake within 30 days of purchase and we will replace it - no questions asked. We stand behind our products one hundred percent, so you can sit behind the wheel with pride.

** Please call Scott Drake Customer Service for a Return Authorization (RA) before returning any product. Proof of purchase and dated receipt must be present with any return. All returned products are tested and if found to be damaged by the installer, no replacement will be issued. You pay the cost to ship to us, we pay for the return shipping. Guarantee does not include any labor and/or tax charges incurred.*

To place an order, or for current pricing, call your authorized Scott Drake dealer.

For a list of dealers in your area, or for any other questions about Scott Drake products, visit www.scottdrake.com or call our customer service department toll free:

1.800.999.0289

Mon - Thurs 7:00 a.m. to 5:00 p.m.
Friday 7:00 a.m. to 4:30 p.m. - PST



130 Cassia Way
Henderson, NV 89014
t: 702.853.2060
f: 702.853.2062